

# CAPILLARY THERMOSTATS RT 8802, RT 8802.01A

### **DESCRIPTION**

Capillary thermostat RT is a single-pole temperature regulator based on the principle of liquid dilatation. It consists of two basic parts: switching unit and capillary temperature sensor. There is a protective earth pin od the cover. Regulated temperature can be set in control range by user. Installation is made by two M4 screws.



#### **ADVANTAGES**

- Variable location of temperature sensor in relation to position of switching unit
- Switching unit can be installed in any position
- Capillary can be bent according to installation need
- No consumption of electrical power Low operating and servicing costs

### **TECHNICAL DATA**


Control range	35°C ÷ 95°C		
Variation of maximal cutout temperature	±4°C		
Switching difference	2-5K		
Rated current	16 (2,6) A		
Rated voltage	240 V		
Temperature range (switching unit)	0°C to 150°C		
Max. Temperature (sensor)	110°C		
Protection	IP 00, RT built-in thermostat		
Protection class	I		
Lifetime	100 000 working cycles		
Capillary length	1 459 mm		
Min. radius of capillary bend	R <sub>min</sub> = 5 mm		
Connecting terminals	Flat pins 6,3 x 0,8 mm according to ČSN EN 612 10		

In agreement with the manufacturer, the control range can be shifted to lower temperature, RT can be supplied in a switchable version or in 8802.01U with 90°C outles (angled version - see technical drawings). Futher information can be obtained from the manufacturer.


#### **OVERVIEW OF TYPE DESIGNATION**

Type	Control range [°C]		terminals	Design (straight/ angular)	Ground pin
8802.01	35-95	Breaking	2	Straight	Yes
8802.01U	35-95	Breaking	2	Angular	Yes


### **TECHNICAL DRAWINGS**

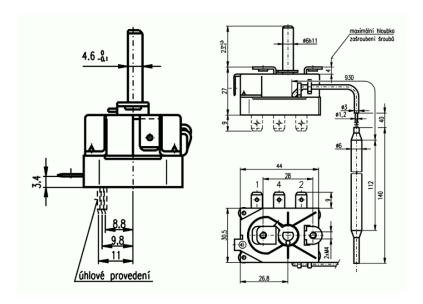

Control range



Wiring scheme in open position



Wiring scheme in close position



The terminal marking is made on the switch body

## CONTACTS

## APATOR POWOGAZ CZECHIA s.r.o.

Havlíčkova 919/24 787 01 Šumperk Czech Republic

Tel.: +420 583 718 261 E-mail: prodej@metra-su.cz Web: www.apator.cz Your distributor:

The manufacturer reserves the right to change design, technical specifications and accesories without priot notice. K2O25/10a